




FLEXAREN[®] 14001

EVA-Copolymer

[®]
FLEXAREN

FLEXAREN[®] 14001 is a high quality ethylene vinyl acetate copolymer with 14 % content of vinyl acetate. The product is manufactured by high pressure tubular process.

FLEXAREN[®] 14001 is more elastic than LDPE and compatible with a wide range of polymers. It can be processed with the same equipment.

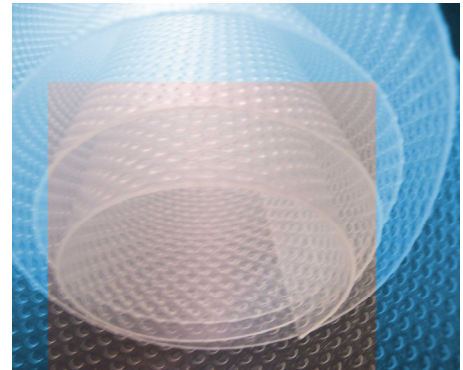

Properties

- flexibility (especially also at low temperatures)
- high transparency
- good mechanical properties

Application

- stretch films
- agricultural films
- sealing profiles for windows
- flexible hoses

Property	Value	Unit	Method
MFI (@ 190°C; 2,16kg)	0.7	g/10min	ISO 1133
Density (@ 20°C)	0.934	g/cm ³	DIN EN ISO 1183-1
VA content	14	wt. -%	FTIR
Vicat-softening-temperature	67	°C	ISO 306 Method A
Hardness Shore A	92	-	ISO 868
Hardness Shore D	36	-	ISO 868
Strength (@ 50% Elongation)	4.5	MPa	ISO 527 (PK 1 BA)
Tensile strength (@ break)	20	MPa	ISO 527 (PK 1 BA)
Elongation (@ break)	> 700	%	ISO 527 (PK 1 BA)
Tensile strength (@ film 50 µm)	MD 32	MPa	ISO 527
Tensile strength (@ film 50 µm)	TD 25	MPa	ISO 527
Processing recommendation	100 - 150	°C	-

The values listed are standard values.



EVA-Copolymer

®
FLEXAREN

Food Legislation

All monomers used to produce commodities of FLEXAREN® are listed in the EC directive 2002/72.

Safety and Environment

CAS No.: 24937-78-8

FLEXAREN® has not been classified as hazardous material in accordance with the Hazardous Material Act and does not require marking. FLEXAREN® can be reused, burned for power generation or disposed without risk. Therefore please take notice of the local valid rules. For further safety-relevant information please refer to the Material Safety Data Sheet.



Packaging, Shipment Conditions and Storage

FLEXAREN® is delivered as granular material of natural colouring, preferably packed in 25 kg-PE-bags on lined pallets of 750 kg each or as loose material in bulk trucks. Other types of shipping and packaging are possible.

FLEXAREN® shall be stored in its original packaging at room temperature at a dry place. Direct sun radiation or contact with water should be avoided.

Please do not hesitate to contact us for further details.

Innospec Leuna GmbH
Postfach 1111, D-06234 Leuna, Germany
Tel.: +49(0)3461-434065
Fax : +49(0)3461-434070
E-mail: leuna@innospecinc.com
www.innospecinc.com

The general points listed correspond to our current knowledge and have been elaborated to the best of our belief and under consideration of professional care. Herewith, we do not guarantee definite properties nor suitability for a particular application. It is the customer's duty to particularly check suitability of the product for the use intended.